



FEATURES

Intended Use:	Indoor,outdoor,SIDESIGN
Installation:	Wall
Body/Structure:	Cast aluminum body
Painting:	Epoxy powder coating with special outdoor treatment
Finish:	Gripping white
Glass/Screen:	Decorative extra clear tempered glass 15mm thick
Driver:	Integrated


TECHNICAL DATA

Tension:	220/240v
Beam:	Symmetrical diffusing single emission 40°
Current:	350mA
Insulation class:	2
Weight:	2.9 kg
IP grade:	IP65
Grade IK:	8
Glow wire:	850° °C
Lamp included:	Yes
LED type:	Led GB
Overall power:	13.5 W
Appliance flow:	1650 lm
Nominal duration:	50.000 ore L80 B20
Color temperature:	3000 K
Color rendering index:	>90
Color consistency:	3 SDCM



NOTES

TECHNICAL DRAWING

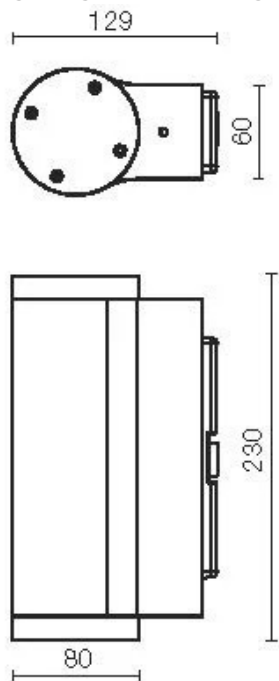

COMPANY

Side Spa has always been a benchmark in the manufacturing industry for its constant focus on product quality, assembly and sustainability of its items. The company is distinguished by its dedication to offering customers the highest quality products that meet needs and exceed expectations.

Side Spa pays the utmost attention to the quality of its products. Each stage of production undergoes rigorous quality control to ensure that only first-class items reach the market. By using high-quality materials and adopting state-of-the-art manufacturing processes, the company is able to offer products that stand the test of time and maintain their performance over the years. Quality is a top priority for Side Spa, which strives to meet the highest standards of excellence.