



## FEATURES

Intended Use:	Exteriors
Installation:	Ceiling/wall Mounting
Body/Structure:	Extruded aluminum body-Stainless steel heads.
Painting:	Anodized
Finish:	Anodized aluminum
Reflector/Optics:	Adjustable optics +/-90
Glass/Screen:	Transparent tempered glass
Driver:	Remote driver for LED, 24Vdc output

## TECHNICAL DATA

Tension:	220-240V 50/60Hz
Beam:	Symmetrical diffusing 30°
Insulation class:	3
Weight:	1.8 kg
IP grade:	65
Grade IK:	7
Glow wire:	650 °C
Lamp included:	Yes
LED type:	Power LED
Overall power:	25.4 W
Appliance flow:	2156 lm
Nominal duration:	50000
Color temperature:	4000 K
Color rendering index:	>90
Color consistency:	3 SDCM

LIGHT SOURCE: 1 x LED 11.20W 1450lm




## NOTES

IP 20 Remote driver supplied  
 IP 67 On request code 645311-67



On request: fixed brackets for wall mounting

Maximum nighttime ambient temperature when the fitting is on not exceeding 50°C  
 Minimum nighttime ambient temperature when the fitting is on not lower than -20°C  
 Maximum daytime ambient temperature when the fitting is off not exceeding 60°C

**TECHNICAL DRAWING**



**PHOTOMETRIC CURVES**

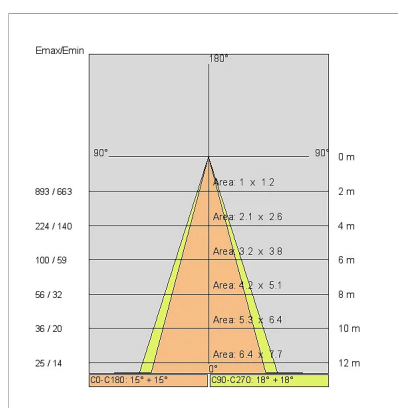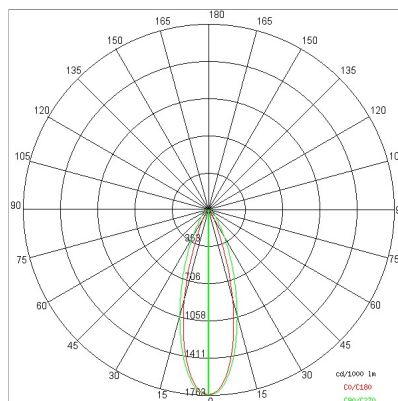

**COMPANY**

Side Spa has always been a benchmark in the manufacturing industry for its constant focus on product quality, assembly and sustainability of its items. The company is distinguished by its dedication to offering customers the highest quality products that meet needs and exceed expectations.

Side Spa pays the utmost attention to the quality of its products. Each stage of production undergoes rigorous quality control to ensure that only first-class items reach the market. By using high-quality materials and adopting state-of-the-art manufacturing processes, the company is able to offer products that stand the test of time and maintain their performance over the years. Quality is a top priority for Side Spa, which strives to meet the highest standards of excellence.