



FEATURES

| | |
|-------------------|------------------------------------------------------|
| Intended Use: | Indoor,outdoor,SIDESIGN |
| Installation: | Wall |
| Body/Structure: | Cast aluminum body |
| Painting: | Epoxy powder coating with special outdoor treatment |
| Finish: | Griming white |
| Reflector/Optics: | Pure aluminum reflector |
| Glass/Screen: | Decorative extra clear tempered glass thickness 15mm |
| Driver: | Integrated |


TECHNICAL DATA

| | |
|------------------------|---------------------------|
| Tension: | 220/240V |
| Beam: | Diffusing bi-emission 40° |
| Weight: | 3.25 kg |
| IP grade: | IP 65 |
| Grade IK: | 8 |
| Lamp included: | Yes |
| LED type: | Led GB |
| Overall power: | 27 W |
| Appliance flow: | 3300 lm |
| Nominal duration: | 50.000 ore L80 B20 |
| Color temperature: | 3000 K |
| Color rendering index: | >90 |
| Color consistency: | 3 SDCM |



NOTES

TECHNICAL DRAWING

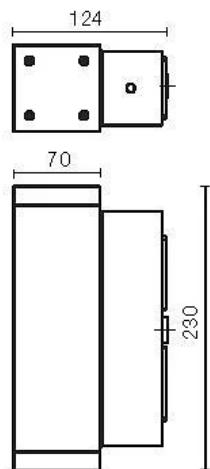

COMPANY

Side Spa has always been a benchmark in the manufacturing industry for its constant focus on product quality, assembly and sustainability of its items. The company is distinguished by its dedication to offering customers the highest quality products that meet needs and exceed expectations.

Side Spa pays the utmost attention to the quality of its products. Each stage of production undergoes rigorous quality control to ensure that only first-class items reach the market. By using high-quality materials and adopting state-of-the-art manufacturing processes, the company is able to offer products that stand the test of time and maintain their performance over the years. Quality is a top priority for Side Spa, which strives to meet the highest standards of excellence.