



FEATURES

| | |
|-------------------|--|
| Intended Use: | Interior |
| Installation: | Track Mounting |
| Fixing: | Electrical adapter for rail mounting |
| Body/Structure: | Die-cast aluminum body EN AB-47100 |
| Painting: | Polyester powder coating with special outdoor treatment (sandblasting, pickling, No. 3 washing, fluorozincing, epoxy powder primer and polyester powder surface finish). |
| Finish: | White |
| Reflector/Optics: | Swiveling optical compartment, tilt 0 - 60° in the vertical axis |
| Glass/Screen: | Clear screen-printed tempered glass |
| Driver: | Integrated driver for LED, 450mA dc stabilized output |

TECHNICAL DATA


| | |
|------------------------|-----------------------|
| Tension: | 230V |
| Beam: | Symmetrical diffusing |
| Current: | 450mA |
| Insulation class: | 1 |
| Weight: | 2 kg |
| IP grade: | 20 |
| Grade IK: | 6 |
| Glow wire: | 850 °C |
| Lamp included: | Yes |
| LED type: | COB LED |
| Overall power: | 19.3 W |
| Appliance flow: | 1873 lm |
| Nominal duration: | 50.000 (h) L90 B20 |
| Color temperature: | 3000 K |
| Color rendering index: | >90 |
| Color consistency: | 3 SDCM |

LIGHT SOURCE: 1 x 16.3W 1873lm





NOTES

TECHNICAL DRAWING



PHOTOMETRIC CURVES

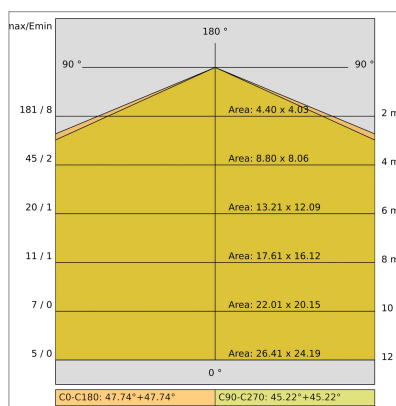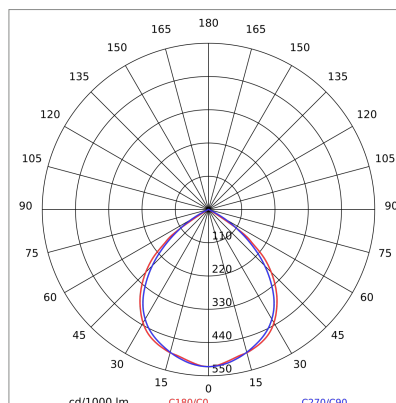

COMPANY

Side Spa has always been a benchmark in the manufacturing industry for its constant focus on product quality, assembly and sustainability of its items. The company is distinguished by its dedication to offering customers the highest quality products that meet needs and exceed expectations.

Side Spa pays the utmost attention to the quality of its products. Each stage of production undergoes rigorous quality control to ensure that only first-class items reach the market. By using high-quality materials and adopting state-of-the-art manufacturing processes, the company is able to offer products that stand the test of time and maintain their performance over the years. Quality is a top priority for Side Spa, which strives to meet the highest standards of excellence.