



FEATURES

| | |
|-------------------|--|
| Intended Use: | Exteriors |
| Installation: | Floor/Floor |
| Fixing: | Via pre-drilled holes for hardware (not included) |
| Body/Structure: | Extruded aluminum body and die-cast aluminum optical compartment |
| Painting: | Polyester powder coating with special outdoor treatment (sandblasting, pickling, No. 3 washing, fluorozirconing, epoxy powder primer and polyester powder surface finish). |
| Finish: | Black |
| Reflector/Optics: | Die-cast conical reflector |
| Glass/Screen: | Transparent glass |
| Driver: | Integrated driver for LED, 500mA dc stabilized output |

TECHNICAL DATA

| | |
|------------------------|---------------------------|
| Tension: | 220-240V 50/60Hz |
| Beam: | Symmetrical, one-way 180° |
| Current: | 500mA |
| Insulation class: | 2 |
| Weight: | 9 kg |
| IP grade: | 65 |
| Grade IK: | 10 |
| Glow wire: | 850 °C |
| Lamp included: | Yes |
| LED type: | SMD LED |
| Overall power: | 23 W |
| Appliance flow: | 440 lm |
| Nominal duration: | 50.000 (h) L90 B50 |
| Color temperature: | 4000 K |
| Color rendering index: | >90 |
| Color consistency: | 3 SDCM |
| Bug Evaluation: | B0-U1-G0 |
| CEN flow code: | 19-69-95-99-100 |


LIGHT SOURCE: 1 x 20W 2652.40lm




NOTES

Maximum nighttime ambient temperature when the fitting is on not exceeding 50°C
 Minimum nighttime ambient temperature when the fitting is on not lower than -20°C
 Maximum daytime ambient temperature when the fitting is off not exceeding 60°C


TECHNICAL DRAWING



PHOTOMETRIC CURVES

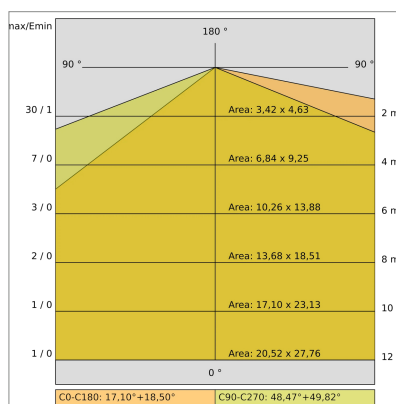


ACCESSORIES




Pit for ground fixing

899




Galvanized steel fixing plate with anchor belts

4074



IP68 connector \varnothing 7 to 12mm

646308 NE



IP68 "T" connector \varnothing 7 to 10mm for continuous rows

646636 NE

COMPANY

Side Spa has always been a benchmark in the manufacturing industry for its constant focus on product quality, assembly and sustainability of its items. The company is distinguished by its dedication to offering customers the highest quality products that meet needs and exceed expectations.

Side Spa pays the utmost attention to the quality of its products. Each stage of production undergoes rigorous quality control to ensure that only first-class items reach the market. By using high-quality materials and adopting state-of-the-art manufacturing processes, the company is able to offer products that stand the test of time and maintain their performance over the years. Quality is a top priority for Side Spa, which strives to meet the highest standards of excellence.