




## FEATURES

Intended Use:	Interior
Installation:	Floor/wall/ceiling fixing
Fixing:	With brackets provided
Body/Structure:	Extruded aluminum body
Painting:	Anodized
Finish:	Anodized aluminum
Glass/Screen:	Polycarbonate diffuser screen
Driver:	Not included; must be ordered separately

## TECHNICAL DATA

Beam:	Symmetrical diffusing 100°
Insulation class:	3
Weight:	1.55 kg
IP grade:	40
Glow wire:	850 °C
Lamp included:	Yes
LED type:	SMD LED
Overall power:	28.8 W
Appliance flow:	2647 lm
Nominal duration:	25.000 (h) L80 B20
Color temperature:	4000 K
Color rendering index:	>90
Color consistency:	5 SDCM


LIGHT SOURCE: 1 x LED 72.00W 8250lm





## NOTES

l = 2020mm  
On request: 12Vdc

TECHNICAL DRAWING



PHOTOMETRIC CURVES

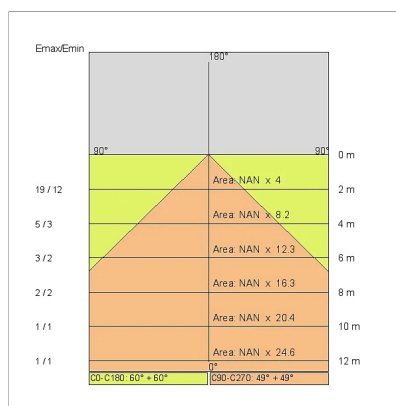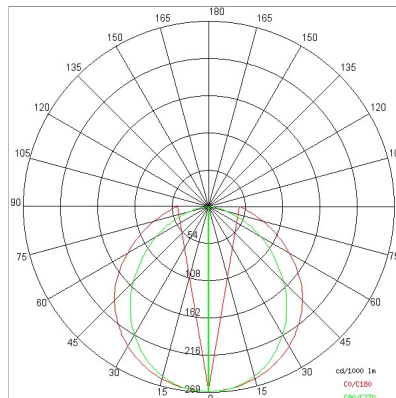

ACCESSORIES



Support for adjustable installation

130

COMPANY

Side Spa has always been a benchmark in the manufacturing industry for its constant focus on product quality, assembly and sustainability of its items. The company is distinguished by its dedication to offering customers the highest quality products that meet needs and exceed expectations.

Side Spa pays the utmost attention to the quality of its products. Each stage of production undergoes rigorous quality control to ensure that only first-class items reach the market. By using high-quality materials and adopting state-of-the-art manufacturing processes, the company is able to offer products that stand the test of time and maintain their performance over the years. Quality is a top priority for Side Spa, which strives to meet the highest standards of excellence.