



FEATURES

Intended Use:	Interior
Installation:	Recessed Ceiling
Recessed hole:	Recess hole diam. 58 mm.
Fixing:	Fixing springs and screen made of thermoplastic material.
Body/Structure:	Sheet steel body
Painting:	Interior polyester powder coating
Finish:	Black
Reflector/Optics:	Metalized polycarbonate mirror reflector
Glass/Screen:	Polycarbonate diffuser screen
Driver:	Not included; must be ordered separately

TECHNICAL DATA

Beam:	Symmetrical diffusing 45°
Current:	350mA
Insulation class:	3
Weight:	0.07 kg
IP grade:	40
Glow wire:	850 °C
Lamp included:	Yes
LED type:	COB LED
Overall power:	3.5 W
Appliance flow:	346 lm
Nominal duration:	50.000 (h) L80 B20
Color temperature:	3000 K
Color rendering index:	>90
Color consistency:	3 SDCM

LIGHT SOURCE: 1 x LED 3.50W 350lm




NOTES



heatsink and cable length 0.3 m.

recommended power supplies: 644758 and 644759-1

TECHNICAL DRAWING



PHOTOMETRIC CURVES

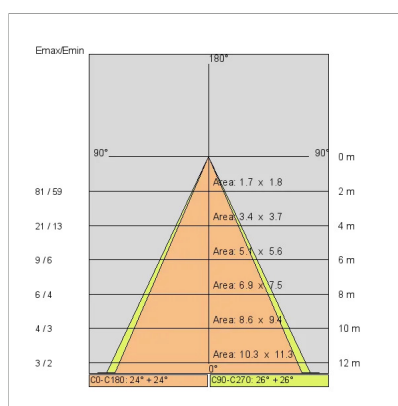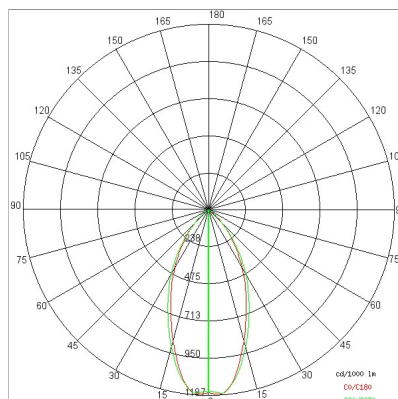

DRIVER

644759-1

15W 350mA IP20 ON-OFF Driver



644758
DRIVER

Driver ON-OFF 8W 350mA IP20



ACCESSORIES

Ring for ceiling mounting



120

120-CR

COMPANY

Side Spa has always been a benchmark in the manufacturing industry for its constant focus on product quality, assembly and sustainability of its items. The company is distinguished by its dedication to offering customers the highest quality products that meet needs and exceed expectations.

Side Spa pays the utmost attention to the quality of its products. Each stage of production undergoes rigorous quality control to ensure that only first-class items reach the market. By using high-quality materials and adopting state-of-the-art manufacturing processes, the company is able to offer products that stand the test of time and maintain their performance over the years. Quality is a top priority for Side Spa, which strives to meet the highest standards of excellence.