



## FEATURES

Intended Use:	Exteriors,SIDESIGN
Installation:	Projector
Body/Structure:	Die-cast aluminum body
Painting:	Polyester powder coating with special treatment for outdoor use.Stainless steel bracket (AISI 316L) painted or with galvanic treatment
Finish:	Satin chrome
Glass/Screen:	Extra-clear screen-printed tempered protective glass, scratch and impact resistant.
Driver:	Integrated

## TECHNICAL DATA

Tension:	220/240V
Beam:	Indirect light 38°
Weight:	1.00 kg
IP grade:	IP67
Grade IK:	IK08
Glow wire:	850° C
Lamp included:	Yes
LED type:	COB LED
Overall power:	16.4 W
Appliance flow:	1282 lm
Nominal duration:	50.000 ore L80 B20
Color temperature:	3000 K
Color rendering index:	>90
Color consistency:	3 SDCM



LIGHT SOURCE: 1 x LED 14.40W 1518lm



## NOTES

TECHNICAL DRAWING

PHOTOMETRIC CURVES

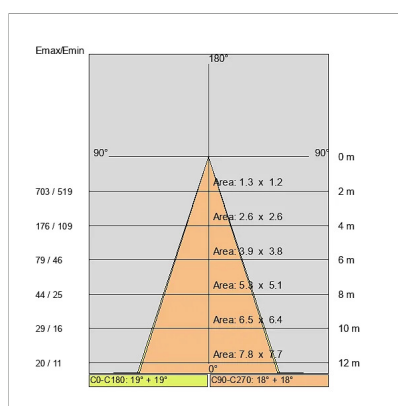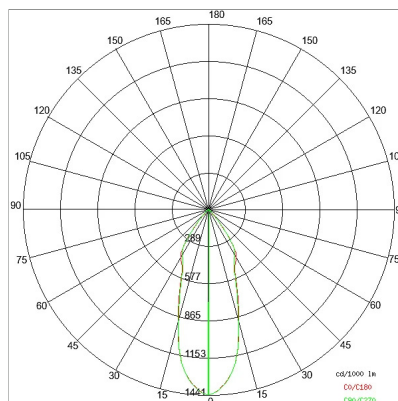

COMPANY

Side Spa has always been a benchmark in the manufacturing industry for its constant focus on product quality, assembly and sustainability of its items. The company is distinguished by its dedication to offering customers the highest quality products that meet needs and exceed expectations.

Side Spa pays the utmost attention to the quality of its products. Each stage of production undergoes rigorous quality control to ensure that only first-class items reach the market. By using high-quality materials and adopting state-of-the-art manufacturing processes, the company is able to offer products that stand the test of time and maintain their performance over the years. Quality is a top priority for Side Spa, which strives to meet the highest standards of excellence.