



FEATURES

| | |
|-----------------|--|
| Intended Use: | Interior |
| Installation: | Recessed Ceiling |
| Recessed hole: | ø 54x54 mm |
| Fixing: | Steel wire springs |
| Body/Structure: | Die-cast aluminum body EN AB-47100 |
| Painting: | Interior polyester powder coating |
| Finish: | Grey |
| Glass/Screen: | Satin polycarbonate diffuser screen |
| Driver: | Remote driver for LED, 200mA dc stabilized output |

TECHNICAL DATA

| | |
|------------------------|---------------------------|
| Tension: | 220-240V 50/60Hz |
| Beam: | Symmetrical diffusing 90° |
| Current: | 200mA |
| Insulation class: | 2 |
| Weight: | 0.20 kg |
| IP grade: | 54 |
| Glow wire: | 650 °C |
| Lamp included: | Yes |
| LED type: | COB LED |
| Overall power: | 8 W |
| Appliance flow: | 387 lm |
| Nominal duration: | 50.000 (h) L90 B20 |
| Color temperature: | 4000 K |
| Color rendering index: | >90 |
| Color consistency: | 3 SDCM |


LIGHT SOURCE: 1 x LED 7.00W 880lm





NOTES

upon request: led with color temperature 2700k and dali

TECHNICAL DRAWING




PHOTOMETRIC CURVES

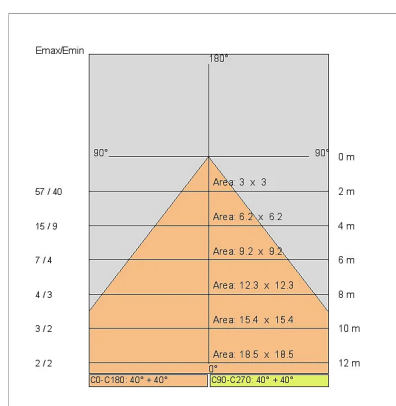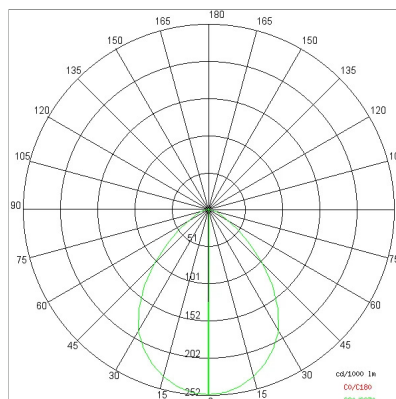

DRIVER

645732

6W to 42W 150/1050mA IP20 ON-OFF Driver



COMPANY

Side Spa has always been a benchmark in the manufacturing industry for its constant focus on product quality, assembly and sustainability of its items. The company is distinguished by its dedication to offering customers the highest quality products that meet needs and exceed expectations.

Side Spa pays the utmost attention to the quality of its products. Each stage of production undergoes rigorous quality control to ensure that only first-class items reach the market. By using high-quality materials and adopting state-of-the-art manufacturing processes, the company is able to offer products that stand the test of time and maintain their performance over the years. Quality is a top priority for Side Spa, which strives to meet the highest standards of excellence.