PAR 56 TKF POWER **E9602-LBI-120**

EXTERIOR > UNDER WATER LIGHTS > PAR 56







Intended Use:	Exteriors
Installation:	Floor/wall mounting - to be installed EXCLUSIVELY IN WATER Max 40°C
Body/Structure:	Stainless steel body
Finish:	Satin stainless steel
Glass/Screen:	Clear tempered glass
Driver:	Not included; must be ordered separately

TECHNICAL DATA


Beam:	Symmetrical diffusing 120°
Insulation class:	3
Weight:	1.3 kg
IP grade:	68
Glow wire:	850 °C
Lamp included:	Yes
LED type:	Power LED
Overall power:	65 W
Appliance flow:	5040 lm
Nominal duration:	50000
Color temperature:	5300 K
Color rendering index:	>80
Color consistency:	4 SDCM

LIGHT SOURCE: 1 x LED 65.00W 5040Im



NOTES

Maximum nighttime ambiance temperature when the fitting is on not exceeding 50°C Minimum nighttime ambiance temperature when the fitting is on not lower than -20°C Maximum daytime ambiance temperature when the fitting is off not exceeding 60°C

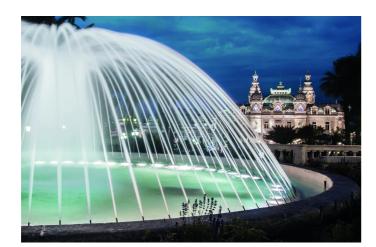








EXTERIOR > UNDER WATER LIGHTS > PAR 56

TECHNICAL DRAWING



PHOTOMETRIC CURVES





ACCESSORIES

COMPANY

Side Spa has always been a benchmark in the manufacturing industry for its constant focus on product quality, assembly and sustainability of its items. The company is distinguished by its dedication to offering customers the highest quality products that meet needs and exceed expectations.

Side Spa pays the utmost attention to the quality of its products. Each stage of production undergoes rigorous quality control to ensure that only first-class items reach the market. By using highquality materials and adopting state-of-the-art manufacturing processes, the company is able to offer products that stand the test of time and maintain their performance over the years. Quality is a top priority for Side Spa, which strives to meet the highest standards of excellence.

