

FEATURES

Intended Use:	Exteriors
Installation:	Ground recessed
Body/Structure:	Stainless steel body and ring/frame - Thermoplastic material formwork
Finish:	Satin stainless steel
Reflector/Optics:	Metalized polycarbonate mirror reflector
Glass/Screen:	Clear screen-printed tempered glass
Driver:	Not included; must be ordered separately

TECHNICAL DATA

Beam:	Asymmetric diffusing AS°
Current:	350mA
Insulation class:	3
Weight:	0.3 kg
IP grade:	67
Grade IK:	7
Drive-over:	Yes
Static load:	500 kg
Glow wire:	850 °C
Lamp included:	Yes
LED type:	COB LED
Overall power:	2 W
Appliance flow:	180 lm
Nominal duration:	50000
Color temperature:	3000 K
Color rendering index:	>80
Color consistency:	3 SDCM

LIGHT SOURCE: 1 x 2W 180lm




NOTES

Optional: ...-TSC TORX security screws



On request:

Maximum nighttime ambient temperature when the fitting is on not exceeding 50°C
 Minimum nighttime ambient temperature when the fitting is on not lower than -20°C
 Maximum daytime ambient temperature when the fitting is off not exceeding 60°C

TECHNICAL DRAWING



PHOTOMETRIC CURVES

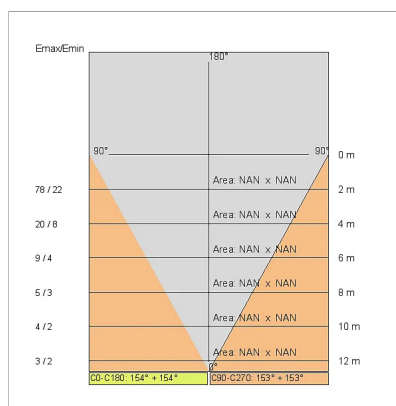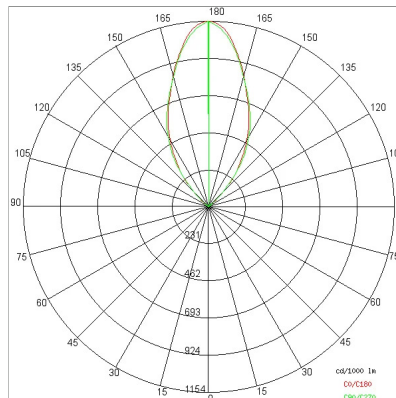

COMPANY

Side Spa has always been a benchmark in the manufacturing industry for its constant focus on product quality, assembly and sustainability of its items. The company is distinguished by its dedication to offering customers the highest quality products that meet needs and exceed expectations.

Side Spa pays the utmost attention to the quality of its products. Each stage of production undergoes rigorous quality control to ensure that only first-class items reach the market. By using high-quality materials and adopting state-of-the-art manufacturing processes, the company is able to offer products that stand the test of time and maintain their performance over the years. Quality is a top priority for Side Spa, which strives to meet the highest standards of excellence.