



## FEATURES

Intended Use:	Interior
Installation:	Recessed Ceiling
Recessed hole:	ø 93x93 mm
Fixing:	Steel springs
Body/Structure:	Die-cast aluminum body EN AB-47100
Painting:	Interior polyester powder coating
Finish:	Black
Glass/Screen:	Satin polycarbonate diffuser screen
Driver:	Remote power supply for LED, stabilized output 350mA dc

## TECHNICAL DATA

Tension:	220-240V 50/60Hz
Beam:	Symmetrical diffusing 90°
Current:	350mA
Insulation class:	5
Weight:	0,51 kg
IP grade:	54
Glow wire:	650 °C
Lamp included:	Yes
LED type:	COB LED
Overall power:	13,5 W
Appliance flow:	1057 lm
Nominal duration:	50.000 (h) L80 B10
Color temperature:	3000 K
Color rendering index:	> 90
Color consistency:	3 SDCM

LIGHT SOURCE: 1 x LED 11.50W 1680lm




## NOTES



On request: led with 2700k color temperature.

On request:

TECHNICAL DRAWING



PHOTOMETRIC CURVES

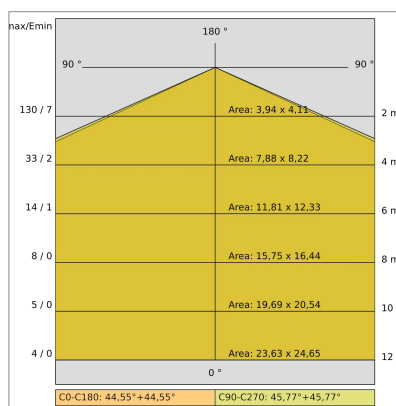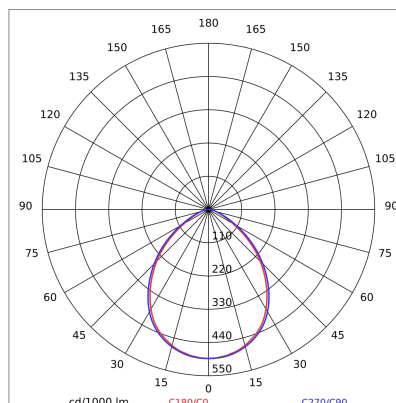

DRIVER

644759-1

15W 350mA IP20 ON-OFF Driver



645732

6W to 42W 150/1050mA IP20 ON-OFF Driver



ACCESSORIES

Container for concrete slabs



148-Q

## COMPANY

Side Spa has always been a benchmark in the manufacturing industry for its constant focus on product quality, assembly and sustainability of its items. The company is distinguished by its dedication to offering customers the highest quality products that meet needs and exceed expectations.

Side Spa pays the utmost attention to the quality of its products. Each stage of production undergoes rigorous quality control to ensure that only first-class items reach the market. By using high-quality materials and adopting state-of-the-art manufacturing processes, the company is able to offer products that stand the test of time and maintain their performance over the years. Quality is a top priority for Side Spa, which strives to meet the highest standards of excellence.