



## FEATURES

Intended Use:	Exteriors,HORTICULTURAL
Installation:	Floor/wall/ceiling fixing
Body/Structure:	Aluminum sheet metal body and aluminum die-cast optical compartment EN AB-47100.
Painting:	Epoxy powder coating with special outdoor treatment
Finish:	Brown
Reflector/Optics:	Metalized polycarbonate mirror reflector
Glass/Screen:	Clear tempered glass
Driver:	Integrated driver for LED, 400mA dc stabilized output

## TECHNICAL DATA

Tension:	220-240V 50/60Hz
Beam:	Symmetrical diffusing 56°
Current:	400mA
Insulation class:	2
Weight:	1 kg
IP grade:	67
Grade IK:	7
Glow wire:	650 °C
Lamp included:	Yes
LED type:	COB LED
Overall power:	16.4 W
Appliance flow:	1189 lm
Nominal duration:	50000 ore (h) L80 B20
Color temperature:	3000 K
Color rendering index:	> 90
Color consistency:	3 SDCM

LIGHT SOURCE: 1 x LED 14.40W 1518lm



## NOTES


On request: remote driver

On request: 24Vdc On request: other colors pole mount accessory



On request:

Maximum nighttime ambience temperature when the fitting is on not exceeding 50°C  
Minimum nighttime ambience temperature when the fitting is on not lower than -20°C  
Maximum daytime ambience temperature when the fitting is off not exceeding 60°C


TECHNICAL DRAWING



PHOTOMETRIC CURVES

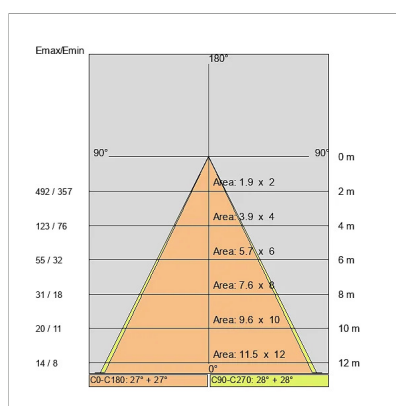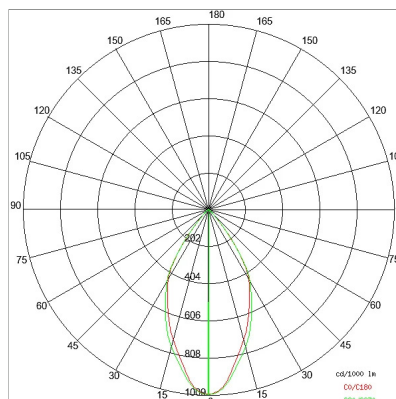

ACCESSORIES




Strap fastening to branches

3137



Painted galvanized steel floor pole H.3m

406207 NE- 3m  
406208 BW- 3m  
406259 GR 3m




Pole attachment kit

E1038 NE  
E1039 GR



Rod with peg 3150

- 3150-GR
- 3150-NE
- 3150-BW
- 3150-VE



Spike to be buried

- E1031 NE



Rod with stainless steel spike - H. 600mm

- 3150-GR
- 3150-NE
- 3150-BW
- 3150-VE
- 3150-CO



Rod with stainless steel spike - H. 1200mm

- 3151-GR
- 3151-NE
- 3151-VE
- 3151-BW
- 3151-CO



Rod with stainless steel spike - H. 1600mm

- 3152-GR
- 3152-NE
- 3152-BW
- 3152-VE
- 3152-CO




Shielding cylinder

- 3134-GR
- 3134-NE
- 3134-BW
- 3134-VE
- 3134-CO



Shielding cylinder 45°

- 3133-GR
- 3133-NE
- 3133-BW
- 3133-VE
- 3133-CO



Frame for accessories

- 3136-GR
- 3136-NE
- 3136-BW
- 3136-VE
- 3136-CO



Baseplate for SPOT 70 - 100mm H.30mm

- 3156-GR
- 3156-NE
- 3156-BW
- 3156-VE
- 3156-CO



Honeycomb grid

- 3131



Diffusing lens

- 3130



Elliptical lens

- 3129

Helical lens



Supply cable protection cover, flexible stainless steel

3162



Pole surface coverage

4083 NE

## COMPANY

Side Spa has always been a benchmark in the manufacturing industry for its constant focus on product quality, assembly and sustainability of its items. The company is distinguished by its dedication to offering customers the highest quality products that meet needs and exceed expectations.

Side Spa pays the utmost attention to the quality of its products. Each stage of production undergoes rigorous quality control to ensure that only first-class items reach the market. By using high-quality materials and adopting state-of-the-art manufacturing processes, the company is able to offer products that stand the test of time and maintain their performance over the years. Quality is a top priority for Side Spa, which strives to meet the highest standards of excellence.