



FEATURES

Intended Use:	Exteriors
Installation:	Floor/wall/ceiling fixing
Body/Structure:	Die-cast aluminum body EN AB-47100
Painting:	Polyester powder coating with special outdoor treatment (sandblasting, pickling, No. 3 washing, fluorozirconing, epoxy powder primer and polyester powder surface finish).
Finish:	Black
Reflector/Optics:	Metalized polycarbonate mirror reflector
Glass/Screen:	Clear tempered glass
Driver:	Integrated driver for LED, 700mA dc stabilized output

TECHNICAL DATA

Tension:	220-240V 50/60Hz
Beam:	Concentric symmetrical 56°
Current:	700mA
Insulation class:	2
Weight:	1.75 kg
IP grade:	67
Grade IK:	07
Glow wire:	650 °C
Lamp included:	Yes
LED type:	COB LED
Overall power:	27 W
Appliance flow:	3445 lm
Nominal duration:	50.000 (h) L80 B20
Color temperature:	3000 K
Color rendering index:	>90
Color consistency:	3 SDCM

LIGHT SOURCE: 1 x 24W 3827lm




NOTES



- On request: remote driver
- On request: 24Vdc On request: other colors pole attachment accessory.
- On request:

Maximum nighttime ambient temperature when the fitting is on not exceeding 50°C
 Minimum nighttime ambient temperature when the fitting is on not lower than -20°C
 Maximum daytime ambient temperature when the fitting is off not exceeding 60°C


TECHNICAL DRAWING

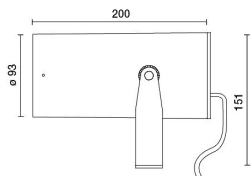

PHOTOMETRIC CURVES

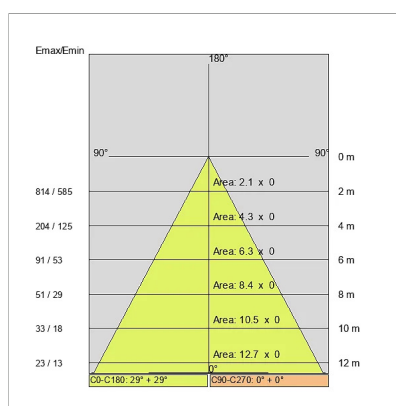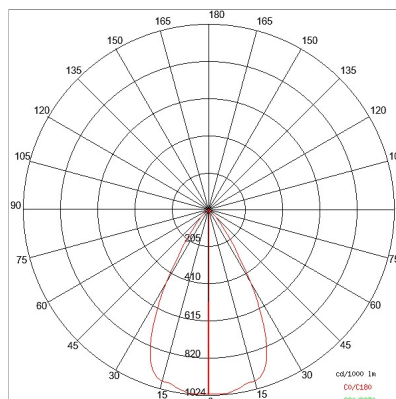

ACCESSORIES




Strap fastening to branches

3137




Painted galvanized steel floor pole H.3m

406207 NE- 3m
406208 BW- 3m
406259 GR 3m



Pole attachment kit

E1038 NE
E1039 GR



Stainless steel spike to be buried

E1031 NE




Shielding cylinder 3141

3141-GR
3141-NE
3141-BW
3141-VE
3141-CO



Shielding cylinder 45°

3142-GR
3142-NE
3142-BW
3142-VE
3142-CO



Frame for accessories

3143-GR
3143-NE
3143-BW BW
3143-VE
3143-CO



Baseplate for SPOT 90 - 100mm H.30mm

3156-GR
3156-NE
3156-BW
3156-VE
3156-CO



Honeycomb grid

3140



Elliptical lens

3139



Diffusing lens

3138



Supply cable protection cover, flexible stainless steel

3162



Pole surface coverage

4083 NE

COMPANY

Side Spa has always been a benchmark in the manufacturing industry for its constant focus on product quality, assembly and sustainability of its items. The company is distinguished by its dedication to offering customers the highest quality products that meet needs and exceed expectations.

Side Spa pays the utmost attention to the quality of its products. Each stage of production undergoes rigorous quality control to ensure that only first-class items reach the market. By using high-quality materials and adopting state-of-the-art manufacturing processes, the company is able to offer products that stand the test of time and maintain their performance over the years. Quality is a top priority for Side Spa, which strives to meet the highest standards of excellence.