




FEATURES

Intended Use:	Exteriors
Installation:	Floor/wall/ceiling fixing
Body/Structure:	Die-cast aluminum body EN AB-47100
Painting:	Epoxy powder coating with special outdoor treatment
Finish:	Grey
Reflector/Optics:	Metalized polycarbonate mirror reflector
Glass/Screen:	Clear tempered glass
Driver:	Integrated driver for LED, 200mA dc stabilized output

TECHNICAL DATA

Tension:	220-240V 50/60Hz
Beam:	Concentric symmetrical 19°
Current:	200mA
Insulation class:	2
Weight:	0.4 kg
IP grade:	67
Grade IK:	07
Glow wire:	650 °C
Lamp included:	Yes
LED type:	COB LED
Overall power:	8 W
Appliance flow:	793 lm
Nominal duration:	50.000 L80 B20
Color temperature:	4000 K
Color rendering index:	>90
Color consistency:	3 SDCM

LIGHT SOURCE: 1 x LED 7.00W 880lm



NOTES


On request: remote driver

On request: 24Vd



On request:

Maximum nighttime ambient temperature when the fitting is on not exceeding 50°C
 Minimum nighttime ambient temperature when the fitting is on not lower than -20°C
 Maximum daytime ambient temperature when the fitting is off not exceeding 60°C

TECHNICAL DRAWING



PHOTOMETRIC CURVES

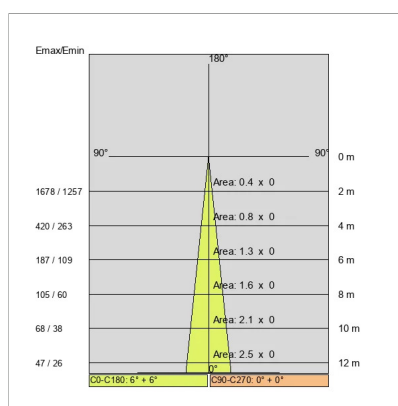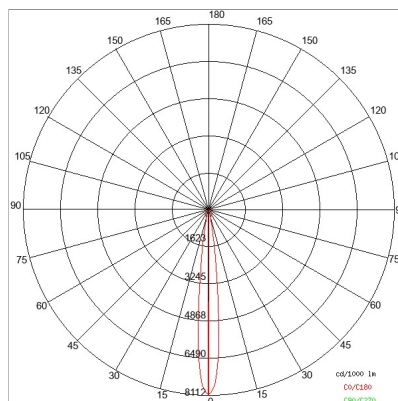


ACCESSORIES



Strap fastening to branches

3137



Spike to be buried

E1031 NE



Rod with stainless steel spike - H. 600mm

3150-GR

3150-NE

3150-BW

3150-VE

3150-CO



Rod with stainless steel spike - H. 1200mm

- 3151-GR
- 3151-NE
- 3151-BW
- 3151-VE
- 3151-CO



Rod with stainless steel spike - H. 1600mm

- 3152-GR
- 3152-NE
- 3152-BW
- 3152-VE
- 3152-CO



Shielding cylinder

- | | |
|------|----|
| 3114 | BR |
| 3115 | NE |



Shielding cylinder 45°

- 3148-GR
- 3148-NE
- 3148-BW
- 3148-VE
- 3148-CO

Shielding cylinder 45°



Frame for accessories

- 3149-GR
- 3149-NE
- 3149-BW
- 3149-VE
- 3149-CO

Baseplate for SPOT 50 - 100mm H.30mm



3156-GR
3156-NE
3156-BW
3156-VE
3156-CO

Alveolar grid



3146

Elliptical lens



3145

Wide flood



3144

Wide flood



3144



Supply cable protection cover, flexible stainless steel

3162

ACCESSORI SPOT 50

3137

COMPANY

Side Spa has always been a benchmark in the manufacturing industry for its constant focus on product quality, assembly and sustainability of its items. The company is distinguished by its dedication to offering customers the highest quality products that meet needs and exceed expectations.

Side Spa pays the utmost attention to the quality of its products. Each stage of production undergoes rigorous quality control to ensure that only first-class items reach the market. By using high-quality materials and adopting state-of-the-art manufacturing processes, the company is able to offer products that stand the test of time and maintain their performance over the years. Quality is a top priority for Side Spa, which strives to meet the highest standards of excellence.