



FEATURES

Intended Use:	Exteriors
Installation:	Recessed Ceiling
Recessed hole:	Ø 61 mm
Fixing:	Flat steel springs
Body/Structure:	Stainless steel body and ring/frame
Finish:	Satin stainless steel
Reflector/Optics:	Metalized polycarbonate mirror reflector
Glass/Screen:	Clear screen-printed tempered glass
Driver:	Not included; must be ordered separately

TECHNICAL DATA

Tension:	220-240V
Beam:	Symmetrical diffusing 30°
Current:	350mA
Insulation class:	3
Weight:	0.5 kg
IP grade:	67
Grade IK:	7
Glow wire:	850 °C
Lamp included:	Yes
LED type:	COB LED
Overall power:	2.2 W
Appliance flow:	120 lm
Nominal duration:	50.000
Color temperature:	4000 K
Color rendering index:	>80
Color consistency:	3 SDCM


LIGHT SOURCE: 1 x 1.2W 120lm





NOTES

Maximum nighttime ambient temperature when the fitting is on not exceeding 50°C
Minimum nighttime ambient temperature when the fitting is on not lower than -20°C
Maximum daytime ambient temperature when the fitting is off not exceeding 60°C

TECHNICAL DRAWING



PHOTOMETRIC CURVES

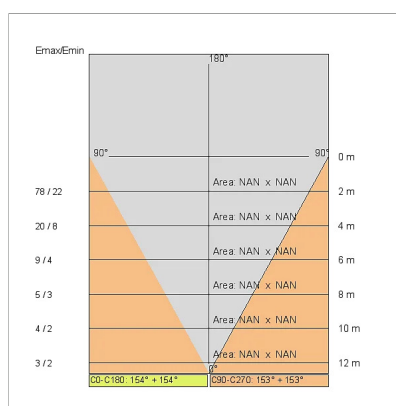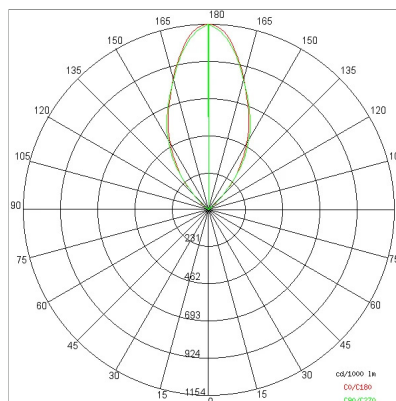

DRIVER

644759-1

15W 350mA IP20 ON-OFF Driver



645939

Driver DALI

DALI dimm. driver for led diodes, programmable output current, Pmax 26W



COMPANY

Side Spa has always been a benchmark in the manufacturing industry for its constant focus on product quality, assembly and sustainability of its items. The company is distinguished by its dedication to offering customers the highest quality products that meet needs and exceed expectations.

Side Spa pays the utmost attention to the quality of its products. Each stage of production undergoes rigorous quality control to ensure that only first-class items reach the market. By using high-quality materials and adopting state-of-the-art manufacturing processes, the company is able to offer products that stand the test of time and maintain their performance over the years. Quality is a top priority for Side Spa, which strives to meet the highest standards of excellence.