



## FEATURES

Intended Use:	Interior
Installation:	Recessed Ceiling
Recessed hole:	Recessed hole diam. 82 mm. Ceiling thickness 1-30 mm.
Fixing:	Steel wire springs
Body/Structure:	Die-cast aluminum body EN AB-47100
Painting:	Interior polyester powder coating
Finish:	White
Reflector/Optics:	Faceted and polished polycarbonate reflector
Glass/Screen:	Satin polycarbonate diffuser screen
Driver:	Not integrated, must be ordered separately

## TECHNICAL DATA

Tension:	220-240V 50/60Hz
Beam:	Symmetrical diffusing 40°
Current:	350mA
Insulation class:	5
Weight:	0.5 kg
IP grade:	20
Grade IK:	04
Glow wire:	850 °C
Lamp included:	Yes
LED type:	COB LED
Overall power:	12.3 W
Appliance flow:	1415 lm
Nominal duration:	50.000 (h) L90 B10
Color temperature:	4000 K
Color rendering index:	>95
Color consistency:	3 SDCM


LIGHT SOURCE: 1 x 12.3W 1415lm





## NOTES

On request:

**TECHNICAL DRAWING**



**PHOTOMETRIC CURVES**

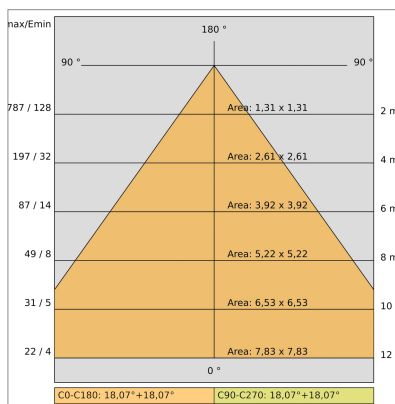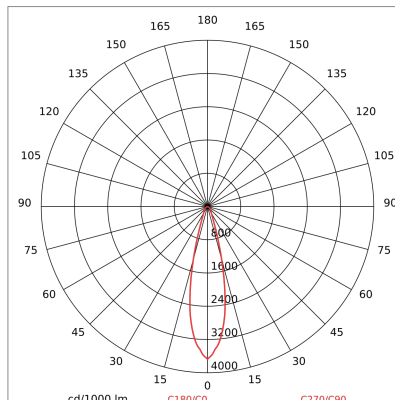

**DRIVER**

644759-1

15W 350mA IP20 ON-OFF Driver



645939

Driver DALI  
 DALI dimm. driver for led diodes, programmable output current, Pmax 26W




646777

DALI+PUSH DIM driver - 42W IP20- 150mA=1050mA



## ACCESSORIES



Compensati ring

117

## COMPANY

Side Spa has always been a benchmark in the manufacturing industry for its constant focus on product quality, assembly and sustainability of its items. The company is distinguished by its dedication to offering customers the highest quality products that meet needs and exceed expectations.

Side Spa pays the utmost attention to the quality of its products. Each stage of production undergoes rigorous quality control to ensure that only first-class items reach the market. By using high-quality materials and adopting state-of-the-art manufacturing processes, the company is able to offer products that stand the test of time and maintain their performance over the years. Quality is a top priority for Side Spa, which strives to meet the highest standards of excellence.