
EXTERIOR > CEILING/WALL LIGHTS > SOLARIS





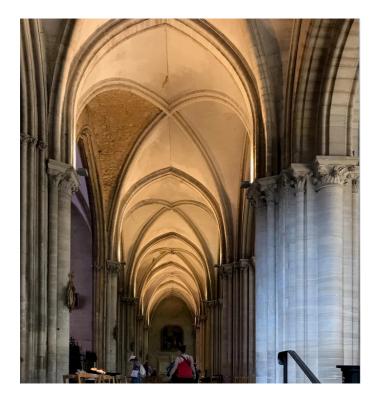

## FEATURES

Intended Use:	Indoor, outdoor
Installation:	Ceiling/wall Mounting
Body/Structure:	Die-cast aluminum body EN AB-47100
Painting:	Polyester powder coating with special outdoor treatment (sandblasting, pickling, No. 3 washing, fluorzirconing, epoxy powder primer and polyester powder surface finish).
Finish:	White
Reflector/Optics:	Swiveling optical compartment, tilt 0 - $60^\circ$ in the vertical axis
Glass/Screen:	Clear screen-printed tempered glass
Driver:	Integrated DALI dimmable driver for LED, max output 525mA

#### TECHNICAL DATA

220-240V 50/60Hz
Asymmetrical AS°
525mA
1
3 kg
65
06
850 °C
Yes
COB LED HE+
39.4 W
5278 lm
50.000 (h) L90 B20
3000 K
>90
3 SDCM

### LIGHT SOURCE: 2 x 17.7W 2925Im




Maximum nighttime ambiance temperature when the fitting is on not exceeding 50°C Minimum nighttime ambiance temperature when the fitting is on not lower than -20°C Maximum daytime ambiance temperature when the fitting is off not exceeding  $60^{\circ}$ C







# TECHNICAL DRAWING



## PHOTOMETRIC CURVES





## COMPANY

Side Spa has always been a benchmark in the manufacturing industry for its constant focus on product quality, assembly and sustainability of its items. The company is distinguished by its dedication to offering customers the highest quality products that meet needs and exceed expectations.

Side Spa pays the utmost attention to the quality of its products. Each stage of production undergoes rigorous quality control to ensure that only first-class items reach the market. By using highquality materials and adopting state-of-the-art manufacturing processes, the company is able to offer products that stand the test of time and maintain their performance over the years. Quality is a top priority for Side Spa, which strives to meet the highest standards of excellence.



