EXTERIOR > WALKOVER MICRO RECESSED UPLIGHTERS > EYES GROUND







| Intended Use:     | Exteriors  |
|-------------------|--|
| Installation:     | Ground recessed  |
| Body/Structure:   | Stainless steel body and ring/frame - Thermoplastic<br>material formwork |
| Finish:           | Satin stainless steel  |
| Reflector/Optics: | LED lens in methacrylate   |
| Glass/Screen:     | Clear screen-printed tempered glass                                      |
| Driver:           | Not included; must be ordered separately                                 |
|                   |  |

### TECHNICAL DATA

| Beam:                  | Elliptical 8x35° |
|------------------------|------------------|
| Current:               | 350mA            |
| Insulation class:      | 3                |
| Weight:                | 0.30 kg          |
| IP grade:              | 67               |
| Grade IK:              | 7                |
| Drive-over:            | Yes              |
| Static load:           | 500 kg           |
| Glow wire:             | 850 °C           |
| Lamp included:         | Yes              |
| LED type:              | Power LED        |
| Overall power:         | 1.2 W            |
| Appliance flow:        | 120 lm           |
| Nominal duration:      | 50.000           |
| Color temperature:     | 4000 K           |
| Color rendering index: | >80              |
| Color consistency:     | 3 SDCM           |
|                        |                  |

LIGHT SOURCE: 1 x 1.2W 120Im





Maximum nighttime ambiance temperature when the fitting is on not exceeding 50°C Minimum nighttime ambiance temperature when the fitting is on not lower than -20°C Maximum daytime ambiance temperature when the fitting is off not exceeding 60°C







EXTERIOR > WALKOVER MICRO RECESSED UPLIGHTERS > EYES GROUND

# SIDE


# TECHNICAL DRAWING



## DRIVER




645732 6W to 42W 150/1050mA IP20 ON-OFF Driver



644759-1

15W 350mA IP20 ON-OFF Driver



645939 Driver DALI DALI dimm. driver for led diodes, programmable output current, Pmax 26W




646364 DRIVER DRIVER ON-OFF14W 350mA IP 67

## ACCESSORIES



EXTERIOR > WALKOVER MICRO RECESSED UPLIGHTERS > EYES GROUND



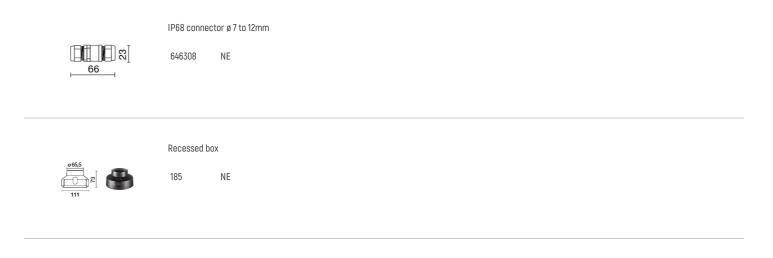

#### COMPANY

Side Spa has always been a benchmark in the manufacturing industry for its constant focus on product quality, assembly and sustainability of its items. The company is distinguished by its dedication to offering customers the highest quality products that meet needs and exceed expectations.

Side Spa pays the utmost attention to the quality of its products. Each stage of production undergoes rigorous quality control to ensure that only first-class items reach the market. By using highquality materials and adopting state-of-the-art manufacturing processes, the company is able to offer products that stand the test of time and maintain their performance over the years. Quality is a top priority for Side Spa, which strives to meet the highest standards of excellence.

