



## FEATURES

Intended Use:	Interior
Installation:	Track Mounting
Fixing:	Electrical adapter for rail mounting
Body/Structure:	Die-cast aluminum body EN AB-47100
Painting:	Interior polyester powder coating
Finish:	Black
Reflector/Optics:	PMMA LED Lens
Driver:	Driver built into the electrical adapter for track mounting, stabilized output 900mA

## TECHNICAL DATA

Tension:	220-240V 50/60Hz
Beam:	Adjustable 10 ± 60°
Current:	700mA
Insulation class:	2
Weight:	117 kg
IP grade:	20
Glow wire:	650 °C
Lamp included:	Yes
LED type:	COB LED
Overall power:	28 W
Appliance flow:	2560 lm
Nominal duration:	50.000 L90 B20
Color temperature:	3000 K
Color rendering index:	> 90
Color consistency:	3 SDCM


LIGHT SOURCE: 1 x LED 24.80W 3015lm





## NOTES

adjustable beam 10-60&deg;. photometry referred 10&deg;

**TECHNICAL DRAWING**

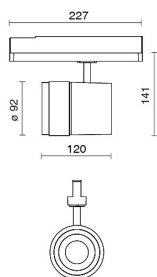

**PHOTOMETRIC CURVES**

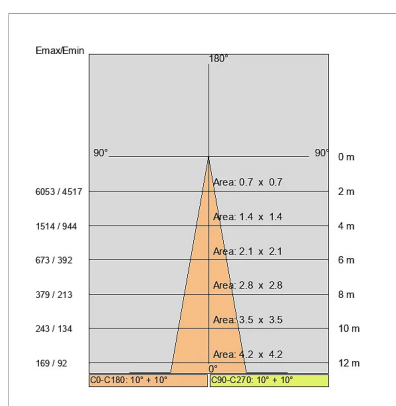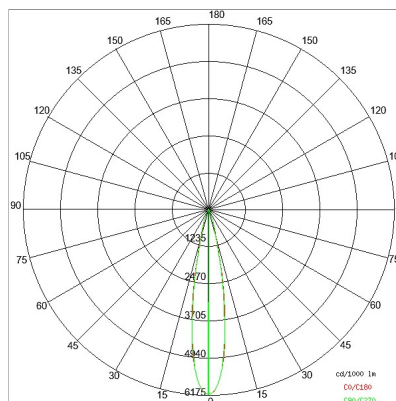

**COMPANY**

Side Spa has always been a benchmark in the manufacturing industry for its constant focus on product quality, assembly and sustainability of its items. The company is distinguished by its dedication to offering customers the highest quality products that meet needs and exceed expectations.

Side Spa pays the utmost attention to the quality of its products. Each stage of production undergoes rigorous quality control to ensure that only first-class items reach the market. By using high-quality materials and adopting state-of-the-art manufacturing processes, the company is able to offer products that stand the test of time and maintain their performance over the years. Quality is a top priority for Side Spa, which strives to meet the highest standards of excellence.