

## FEATURES

Intended Use:	Interior
Installation:	Recessed Ceiling
Recessed hole:	ø 54x54 mm
Fixing:	Steel wire springs
Body/Structure:	Die-cast aluminum body EN AB-47100
Painting:	Interior polyester powder coating
Finish:	Black
Glass/Screen:	Satin polycarbonate diffuser screen
Driver:	Remote driver for LED, 200mA dc stabilized output

## TECHNICAL DATA

Tension:	220-240V 50/60Hz
Beam:	Symmetrical diffusing 90°
Current:	200mA
Insulation class:	2
Weight:	0.20 kg
IP grade:	54
Glow wire:	650 °C
Lamp included:	Yes
LED type:	COB LED
Overall power:	8 W
Appliance flow:	365 lm
Nominal duration:	50.000 (h) L90 B20
Color temperature:	3000 K
Color rendering index:	>90
Color consistency:	3 SDCM


LIGHT SOURCE: 1 x LED 7.00W 830lm





## NOTES

upon request: led with color temperature 2700k and dali

**TECHNICAL DRAWING**




**PHOTOMETRIC CURVES**

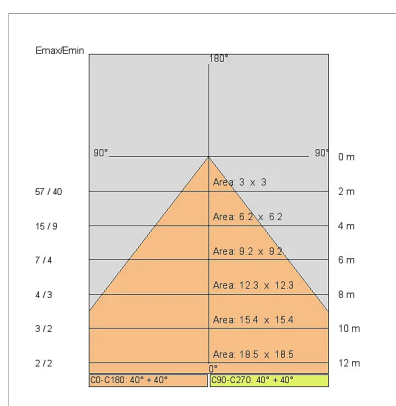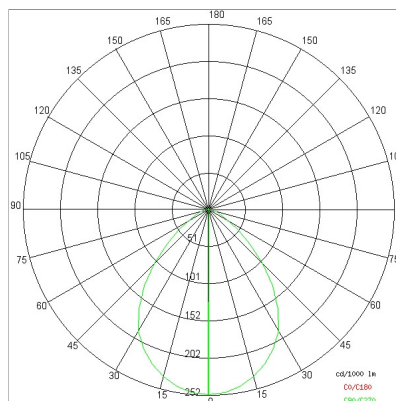

**DRIVER**

645732

6W to 42W 150/1050mA IP20 ON-OFF Driver



**COMPANY**

Side Spa has always been a benchmark in the manufacturing industry for its constant focus on product quality, assembly and sustainability of its items. The company is distinguished by its dedication to offering customers the highest quality products that meet needs and exceed expectations.

Side Spa pays the utmost attention to the quality of its products. Each stage of production undergoes rigorous quality control to ensure that only first-class items reach the market. By using high-quality materials and adopting state-of-the-art manufacturing processes, the company is able to offer products that stand the test of time and maintain their performance over the years. Quality is a top priority for Side Spa, which strives to meet the highest standards of excellence.