



FEATURES

| | |
|-------------------|--|
| Intended Use: | Exteriors |
| Installation: | Floor/wall/ceiling fixing |
| Body/Structure: | Die-cast aluminum body EN AB-47100 |
| Painting: | Polyester powder coating with special outdoor treatment (sandblasting, pickling, No. 3 washing, fluorozirconing, epoxy powder primer and polyester powder surface finish). |
| Finish: | Corten |
| Reflector/Optics: | Metalized polycarbonate mirror reflector |
| Glass/Screen: | Clear tempered glass |
| Driver: | Integrated driver for LED, 700mA dc stabilized output |

TECHNICAL DATA

| | |
|------------------------|----------------------------|
| Tension: | 220-240V 50/60Hz |
| Beam: | Concentric symmetrical 19° |
| Current: | 700mA |
| Insulation class: | 2 |
| Weight: | 1.75 kg |
| IP grade: | 67 |
| Grade IK: | 07 |
| Glow wire: | 650 °C |
| Lamp included: | Yes |
| LED type: | COB LED |
| Overall power: | 27 W |
| Appliance flow: | 3530 lm |
| Nominal duration: | 50.000 (h) L80 B20 |
| Color temperature: | 4000 K |
| Color rendering index: | >90 |
| Color consistency: | 3 SDCM |

LIGHT SOURCE: 1 x 24W 4019lm



NOTES



- On request: remote driver
- On request: 24Vdc On request: other colors pole attachment accessory.
- On request:

Maximum nighttime ambiance temperature when the fitting is on not exceeding 50°C
 Minimum nighttime ambiance temperature when the fitting is on not lower than -20°C
 Maximum daytime ambiance temperature when the fitting is off not exceeding 60°C

TECHNICAL DRAWING



PHOTOMETRIC CURVES

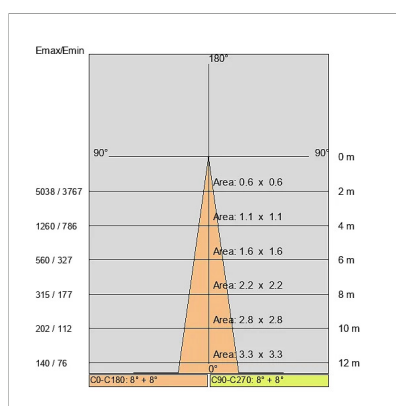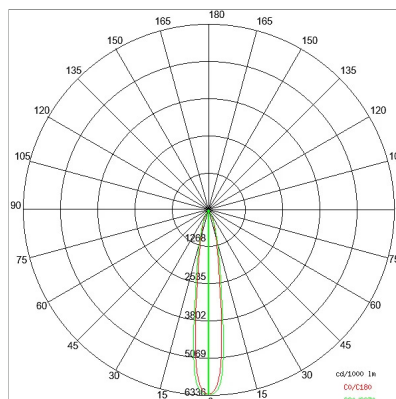

ACCESSORIES




Strap fastening to branches

3137



Painted galvanized steel floor pole H.3m

406207 NE- 3m
406208 BW- 3m
406259 GR 3m



Pole attachment kit

E1038 NE
E1039 GR



Stainless steel spike to be buried

E1031 NE



Shielding cylinder 3141

3141-GR
3141-NE
3141-BW
3141-VE
3141-CO



Shielding cylinder 45°

3142-GR
3142-NE
3142-BW
3142-VE
3142-CO



Frame for accessories

3143-GR
3143-NE
3143-BW BW
3143-VE
3143-CO



Baseplate for SPOT 90 - 100mm H.30mm

3156-GR
3156-NE
3156-BW
3156-VE
3156-CO



Honeycomb grid

3140



Elliptical lens

3139



Diffusing lens

3138



Supply cable protection cover, flexible stainless steel

3162



Pole surface coverage

4083 NE

COMPANY

Side Spa has always been a benchmark in the manufacturing industry for its constant focus on product quality, assembly and sustainability of its items. The company is distinguished by its dedication to offering customers the highest quality products that meet needs and exceed expectations.

Side Spa pays the utmost attention to the quality of its products. Each stage of production undergoes rigorous quality control to ensure that only first-class items reach the market. By using high-quality materials and adopting state-of-the-art manufacturing processes, the company is able to offer products that stand the test of time and maintain their performance over the years. Quality is a top priority for Side Spa, which strives to meet the highest standards of excellence.