

FEATURES

Intended Use:	Interior
Installation:	Recessed Ceiling
Recessed hole:	ø 136x136 mm
Fixing:	Steel springs
Body/Structure:	Die-cast aluminum body EN AB-47100
Painting:	Interior polyester powder coating
Finish:	White
Glass/Screen:	Satin polycarbonate diffuser screen
Driver:	Remote driver for LED, 700mA stabilized output

TECHNICAL DATA

Beam:	Symmetrical diffusing 90°
Current:	700mA
Insulation class:	3
Weight:	0.6 kg
IP grade:	54
Glow wire:	650 °C
Lamp included:	Yes
LED type:	COB LED
Overall power:	24 W
Appliance flow:	2219 lm
Nominal duration:	50.000 ore L80 B10
Color temperature:	3000 K
Color rendering index:	> 90
Color consistency:	3 SDCM

LIGHT SOURCE: 1 x LED 24.00W 3180lm




NOTES



upon request: led with 2700k color temperature.

On request:

TECHNICAL DRAWING



PHOTOMETRIC CURVES

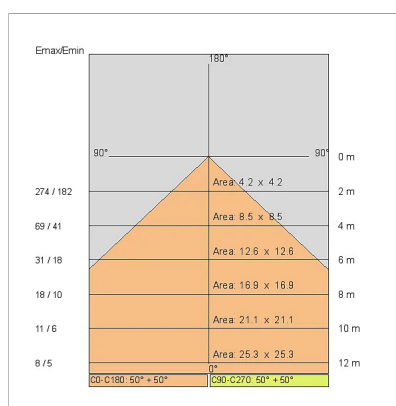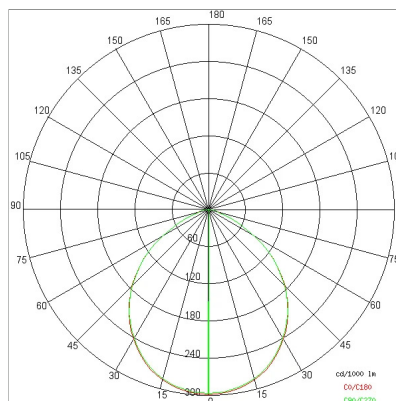

DRIVER

644757

dimnable driver, programmable output current



644757-DA

DRIVER DALI 32W 250÷700mA IP20



646777

DALI+PUSH DIM driver - 42W IP20- 150mA÷1050mA





645732

6W to 42W 150/1050mA IP20 ON-OFF Driver

COMPANY

Side Spa has always been a benchmark in the manufacturing industry for its constant focus on product quality, assembly and sustainability of its items. The company is distinguished by its dedication to offering customers the highest quality products that meet needs and exceed expectations.

Side Spa pays the utmost attention to the quality of its products. Each stage of production undergoes rigorous quality control to ensure that only first-class items reach the market. By using high-quality materials and adopting state-of-the-art manufacturing processes, the company is able to offer products that stand the test of time and maintain their performance over the years. Quality is a top priority for Side Spa, which strives to meet the highest standards of excellence.