
EXTERIOR > WALL STEP LIGHTING > RIQUADRO



F

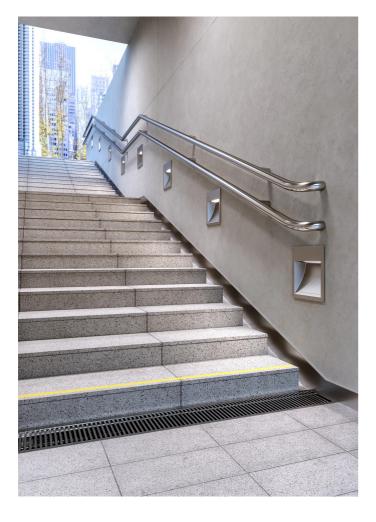


FEATURES

Intended Use:	Exteriors
Installation:	Wall Recessed
Body/Structure:	Die-cast aluminum body EN AB-47100 - Wall formwork made of thermoplastic material.
Painting:	Polyester powder coating with special outdoor treatment (sandblasting, pickling, No. 3 washing, fluorzirconing, epoxy powder primer and polyester powder surface finish).
Finish:	Black
Reflector/Optics:	99.8% pure aluminum reflector
Glass/Screen:	Clear tempered glass
Driver:	Remote driver for LED, 350mA dc stabilized output

TECHNICAL DATA

Beam:Asymmetrical AS°Current:350mAInsulation class:1Weight:3.5 kgIP grade:65Grade IK:6Glow wire:850 °CLamp included:YesLED type:Power LED	
Insulation class: 1 Weight: 3.5 kg IP grade: 65 Grade IK: 6 Glow wire: 850 °C Lamp included: Yes	
Weight:3.5 kgIP grade:65Grade IK:6Glow wire:850 °CLamp included:Yes	
IP grade: 65 Grade IK: 6 Glow wire: 850 °C Lamp included: Yes	
Grade IK: 6 Glow wire: 850 °C Lamp included: Yes	
Glow wire: 850 °C Lamp included: Yes	
Lamp included: Yes	
LED type: Power LED	
Overall power: 8.2 W	
Appliance flow: 215 lm	
Nominal duration: 50.000 (h) L80 B20	
Color temperature: 4000 K	
Color rendering index: >80	
Color consistency: 5 SDCM	

LIGHT SOURCE: 1 x LED 7.20W 620Im



NOTES On request: sandblasted glass On request:


Maximum nighttime ambiance temperature when the fitting is on not exceeding 50°C Minimum nighttime ambiance temperature when the fitting is on not lower than -20°C Maximum daytime ambiance temperature when the fitting is off not exceeding 60°C







EXTERIOR > WALL STEP LIGHTING > RIQUADRO

TECHNICAL DRAWING



PHOTOMETRIC CURVES





ACCESSORIES



884-BR 884-NE

884-GR

Box for wall mounting

COMPANY

Side Spa has always been a benchmark in the manufacturing industry for its constant focus on product quality, assembly and sustainability of its items. The company is distinguished by its dedication to offering customers the highest quality products that meet needs and exceed expectations.

Side Spa pays the utmost attention to the quality of its products. Each stage of production undergoes rigorous quality control to ensure that only first-class items reach the market. By using highquality materials and adopting state-of-the-art manufacturing processes, the company is able to offer products that stand the test of time and maintain their performance over the years. Quality is a top priority for Side Spa, which strives to meet the highest standards of excellence.

