
## 3921-LBC-75

EXTERIOR > CEILING RECESSED > RULED LINEAR IP65





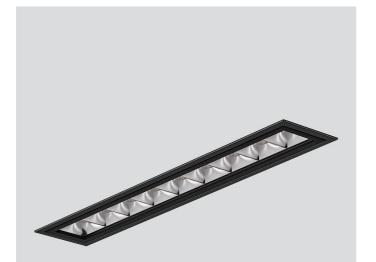

### **FEATURES**

Intended Use:	Interior
Installation:	Recessed
Recessed hole:	ø 60x135 mm
Body/Structure:	Made of extruded aluminum and technopolymer headers
Painting:	Polyester powders
Finish:	White
Reflector/Optics:	Optics with mirrored metallized polycarbonate reflectors
Glass/Screen:	Transparent extra clear screen printed
	·

### **TECHNICAL DATA**

Beam:	Fixed 75°
Current:	500mA
Insulation class:	3
Weight:	1.5 kg
IP grade:	65
Lamp included:	Yes
LED type:	POWER LED
Overall power:	36 W
Appliance flow:	4343 lm
Nominal duration:	50.000 (h) L80 B20
Color temperature:	3000 K
Color rendering index:	>80
Color consistency:	3 SDCM

LIGHT SOURCE: 3 x 12W 1616lm















### NOTES

On request: 12°- AS- AE beams On request: 12 LEDs and multiples of 3
Dimensions: 57x110x133mm 12 LEDs and multiples of 3. Optical compartment side IP54
On request:

DALL

Maximum nighttime ambiance temperature when the fitting is on not exceeding  $50^{\circ}$ C Minimum nighttime ambiance temperature when the fitting is on not lower than -20°C Maximum daytime ambiance temperature when the fitting is off not exceeding  $60^{\circ}$ C





EXTERIOR > CEILING RECESSED > RULED LINEAR IP65

### **TECHNICAL DRAWING**


# 371 361 | 5

### PHOTOMETRIC CURVES






### **DRIVER**




645732

6W to 42W 150/1050mA IP20 ON-OFF Driver



646166

Driver ON-OFF



646777

DALI+PUSH DIM driver- 42W IP20- 150mA÷1050mA



# $\pmb{RULED\ LINEAR\ IP65}\ - \ INCASSO\ single-issue\ L.362mm$

# 3921-LBC-75



EXTERIOR > CEILING RECESSED > RULED LINEAR IP65

### **COMPANY**

Side Spa has always been a benchmark in the manufacturing industry for its constant focus on product quality, assembly and sustainability of its items. The company is distinguished by its dedication to offering customers the highest quality products that meet needs and exceed expectations.

Side Spa pays the utmost attention to the quality of its products. Each stage of production undergoes rigorous quality control to ensure that only first-class items reach the market. By using high-quality materials and adopting state-of-the-art manufacturing processes, the company is able to offer products that stand the test of time and maintain their performance over the years. Quality is a top priority for Side Spa, which strives to meet the highest standards of excellence.

