



FEATURES

Intended Use:	Exteriors
Installation:	Floor/wall/ceiling fixing
Body/Structure:	Body made of extruded aluminum - Heads made of thermoplastic material
Painting:	Anodized
Finish:	Anodized aluminum
Reflector/Optics:	LED lens in methacrylate
Glass/Screen:	Transparent methacrylate diffuser screen
Driver:	Integrated driver for LED, 500mA dc stabilized output

TECHNICAL DATA

Tension:	220-240V 50/60Hz
Beam:	Symmetrical diffusing 35°
Current:	500mA
Insulation class:	2
Weight:	0.25 kg
IP grade:	65
Glow wire:	850 °C
Lamp included:	Yes
LED type:	Power LED
Overall power:	9.5 W
Appliance flow:	656 lm
Nominal duration:	50000 (h) L90 B50
Color temperature:	4000 K
Color rendering index:	>90
Color consistency:	5 SDCM
Bug Evaluation:	B1-U0-G0
CEN flow code:	89-97-100-100-100


LIGHT SOURCE: 1 x LED 8.50W 950lm





NOTES

Maximum nighttime ambience temperature when the fitting is on not exceeding 50°C
 Minimum nighttime ambience temperature when the fitting is on not lower than -20°C
 Maximum daytime ambience temperature when the fitting is off not exceeding 60°C


TECHNICAL DRAWING



PHOTOMETRIC CURVES

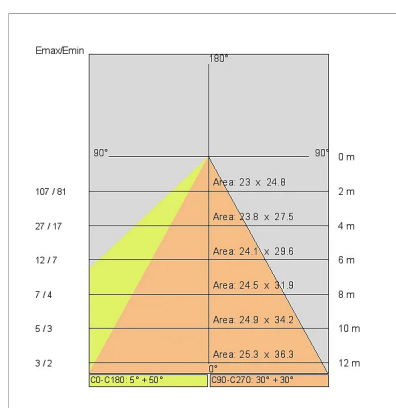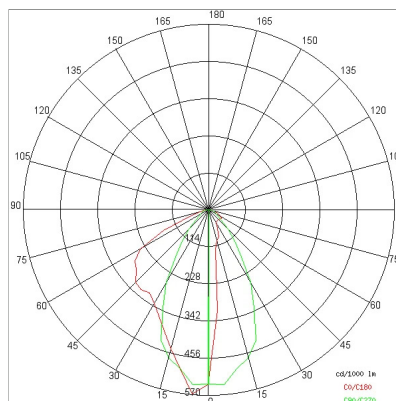

ACCESSORIES



161	H. 46mm	(KIT No. 2 pieces)
162	H. 96mm	(KIT No. 2 pieces)
163	H. 156mm	(KIT No. 2 pieces)

COMPANY

Side Spa has always been a benchmark in the manufacturing industry for its constant focus on product quality, assembly and sustainability of its items. The company is distinguished by its dedication to offering customers the highest quality products that meet needs and exceed expectations.

Side Spa pays the utmost attention to the quality of its products. Each stage of production undergoes rigorous quality control to ensure that only first-class items reach the market. By using high-quality materials and adopting state-of-the-art manufacturing processes, the company is able to offer products that stand the test of time and maintain their performance over the years. Quality is a top priority for Side Spa, which strives to meet the highest standards of excellence.