

E1126-LBI

EXTERIOR > RESIDENTIAL WALL-LIGHTS > AZIMUTH



FEATURES

| | |
|-------------------|--|
| Intended Use: | Exteriors |
| Installation: | Wall Mounting |
| Body/Structure: | Die-cast aluminum body EN AB-47100 |
| Painting: | Polyester powder coating with special outdoor treatment (sandblasting, pickling, No. 3 washing, fluorozirconing, epoxy powder primer and polyester powder surface finish). |
| Finish: | Grey |
| Reflector/Optics: | LED lens in methacrylate |
| Glass/Screen: | Clear screen-printed tempered glass |
| Driver: | Integrated driver for LED, 850mA dc stabilized output |

TECHNICAL DATA

| | |
|------------------------|----------------------------|
| Tension: | 220-240V 50/60Hz |
| Beam: | Concentric symmetrical 10° |
| Current: | 650mA |
| Insulation class: | 1 |
| Weight: | 3.9 kg |
| IP grade: | 65 |
| Glow wire: | 850 °C |
| Lamp included: | Yes |
| LED type: | Power LED |
| Overall power: | 34 W |
| Appliance flow: | 3039 lm |
| Nominal duration: | 50000 (h) L80 B20 |
| Color temperature: | 4000 K |
| Color rendering index: | >90 |
| Color consistency: | 4 SDCM |
| Bug Evaluation: | B3-U1-G0 |
| CEN flow code: | 90-99-100-100-100 |

LIGHT SOURCE: 2 x LED 17.00W 1880lm



NOTES

On request: Light beam 25° - 50° - 65°

Per versione RGB - For RGB version

645247 Driver + Mixer

645246 IR controller


645245 Remote

Maximum nighttime ambiance temperature when the fitting is on not exceeding 50°C



Minimum nighttime ambiance temperature when the fitting is on not lower than -20°C

Maximum daytime ambiance temperature when the fitting is off not exceeding 60°C


TECHNICAL DRAWING



PHOTOMETRIC CURVES

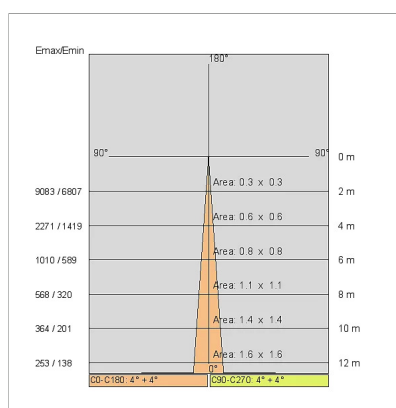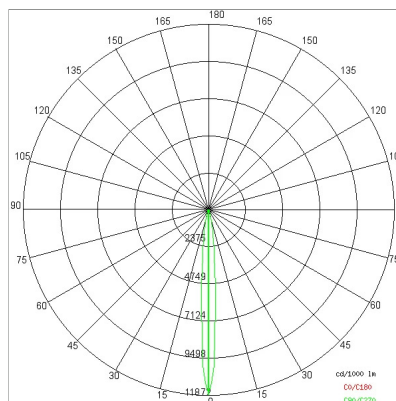

DRIVER



645846
Driver
Driver 350/1050mA

ACCESSORIES

Driver+Mixer

645247

IR controller

645246

Remote

645245

COMPANY

Side Spa has always been a benchmark in the manufacturing industry for its constant focus on product quality, assembly and sustainability of its items. The company is distinguished by its dedication to offering customers the highest quality products that meet needs and exceed expectations.

Side Spa pays the utmost attention to the quality of its products. Each stage of production undergoes rigorous quality control to ensure that only first-class items reach the market. By using high-quality materials and adopting state-of-the-art manufacturing processes, the company is able to offer products that stand the test of time and maintain their performance over the years. Quality is a top priority for Side Spa, which strives to meet the highest standards of excellence.