



## FEATURES

|                   |  |
|-------------------|--|
| Intended Use:     | Exteriors  |
| Installation:     | Ceiling/wall Mounting  |
| Body/Structure:   | Die-cast aluminum body EN AB-47100 - Stainless steel ring.   |
| Painting:         | Polyester powder coating with special outdoor treatment (sandblasting, pickling, No. 3 washing, fluorozirconing, epoxy powder primer and polyester powder surface finish). |
| Finish:           | White  |
| Reflector/Optics: | 99.8% pure aluminum reflector  |
| Glass/Screen:     | Clear tempered glass   |
| Driver:           | Integrated driver for LED, 350mA dc stabilized output  |

## TECHNICAL DATA

|                        |                                |
|------------------------|--------------------------------|
| Tension:               | 220-240V 50/60Hz               |
| Beam:                  | Symmetrical, dual emission 40° |
| Current:               | 350mA                          |
| Insulation class:      | 2                              |
| Weight:                | 2.9 kg                         |
| IP grade:              | 65                             |
| Glow wire:             | 850 °C                         |
| Lamp included:         | Yes                            |
| LED type:              | COB LED                        |
| Overall power:         | 26 W                           |
| Appliance flow:        | 2553 lm                        |
| Nominal duration:      | 50.000 (h) L80 B20             |
| Color temperature:     | 4000 K                         |
| Color rendering index: | >90                            |
| Color consistency:     | 3 SDCM                         |

LIGHT SOURCE: 2 x LED 11.50W 2000lm




## NOTES



composition : 85% aluminum, 5% steel, 4% glass, 3% polypropylene, 1% silicone rubber, 1% copper, 1% tin

Maximum nighttime ambient temperature when the fitting is on not exceeding 50°C  
 Minimum nighttime ambient temperature when the fitting is on not lower than -20°C  
 Maximum daytime ambient temperature when the fitting is off not exceeding 60°C

TECHNICAL DRAWING



PHOTOMETRIC CURVES

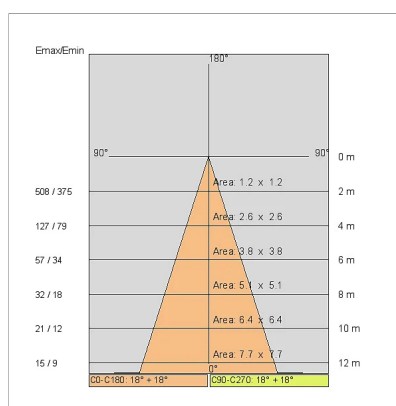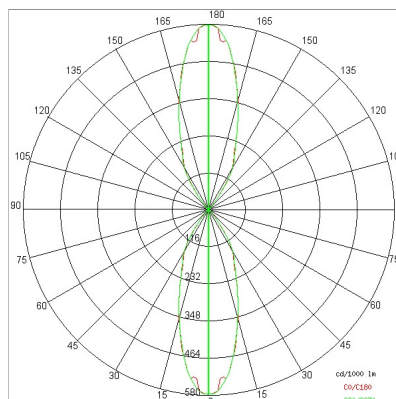

COMPANY

Side Spa has always been a benchmark in the manufacturing industry for its constant focus on product quality, assembly and sustainability of its items. The company is distinguished by its dedication to offering customers the highest quality products that meet needs and exceed expectations.

Side Spa pays the utmost attention to the quality of its products. Each stage of production undergoes rigorous quality control to ensure that only first-class items reach the market. By using high-quality materials and adopting state-of-the-art manufacturing processes, the company is able to offer products that stand the test of time and maintain their performance over the years. Quality is a top priority for Side Spa, which strives to meet the highest standards of excellence.