



FEATURES

| | |
|-------------------|--|
| Intended Use: | Exteriors |
| Installation: | Ground Recessed |
| Body/Structure: | Die-cast aluminum body EN AB-47100 - Wall formwork made of thermoplastic material. |
| Painting: | Luminaire body base painted in polyester powder with special outdoor treatment (sandblasting, pickling, No. 3 washing, fluorzirconating, epoxy powder primer and polyester powder surface finish). |
| Finish: | Grey |
| Reflector/Optics: | LED lens in methacrylate |
| Glass/Screen: | Clear tempered glass |
| Driver: | Integrated driver for LED, 500mA dc stabilized output |

TECHNICAL DATA

| | |
|------------------------|--------------------------------------|
| Tension: | 220-240V 50/60Hz |
| Beam: | Symmetrical, double radiant emission |
| Current: | 500mA |
| Insulation class: | 1 |
| Weight: | 0.8 kg |
| IP grade: | 67 |
| Grade IK: | 10 |
| Drive-over: | Yes |
| Walk-over: | Yes |
| Static load: | 2000 kg |
| Maximum speed: | 5 km/h |
| Glow wire: | 850 °C |
| LED type: | Power LED |
| Overall power: | 3 W |
| Appliance flow: | 51 lm |
| Nominal duration: | 50000 |
| Color temperature: | 4000 K |
| Color rendering index: | >90 |

LIGHT SOURCE: 1 x LED 2.00W 130lm




NOTES

On request: ...-TSC TORX safety screws



Possibility of slipping off the bottom of the formwork

Maximum nighttime ambience temperature when the fitting is on not exceeding 50°C
 Minimum nighttime ambience temperature when the fitting is on not lower than -20°C
 Maximum daytime ambience temperature when the fitting is off not exceeding 60°C

TECHNICAL DRAWING

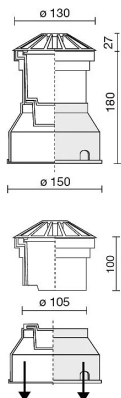

PHOTOMETRIC CURVES

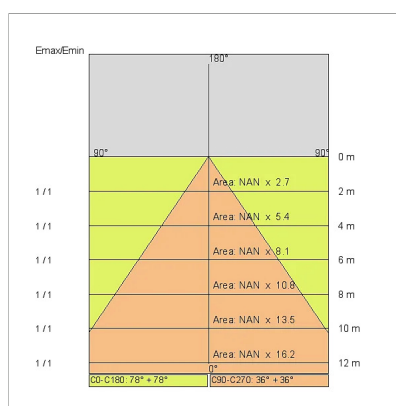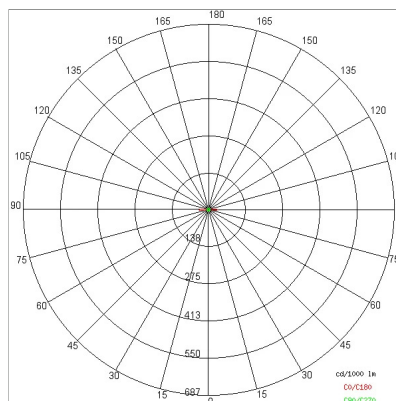

ACCESSORIES



IP68 connector \varnothing 7 to 12mm

646308 NE

COMPANY

Side Spa has always been a benchmark in the manufacturing industry for its constant focus on product quality, assembly and sustainability of its items. The company is distinguished by its dedication to offering customers the highest quality products that meet needs and exceed expectations.

Side Spa pays the utmost attention to the quality of its products. Each stage of production undergoes rigorous quality control to ensure that only first-class items reach the market. By using high-quality materials and adopting state-of-the-art manufacturing processes, the company is able to offer products that stand the test of time and maintain their performance over the years. Quality is a top priority for Side Spa, which strives to meet the highest standards of excellence.